


Bronze Globe Valve Straight Pattern

SDNR, PTFE Seat

Flanged PN16 or Drilled PN6, PN10, BS 10 D/E, ASA 150 or Un-drilled

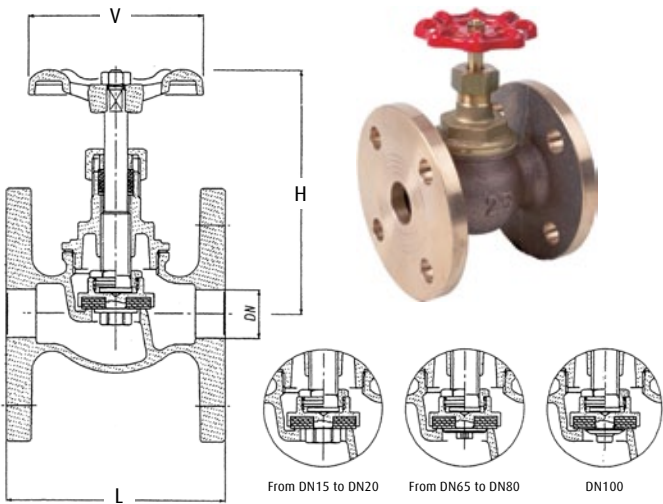

Pressure/Temperature Ratings

Working Pressure	16 Bar
Operating Temperature	-10°C to 180°C

Material List

Body	Bronze RG5
Bonnet	Brass MS58
Gland	Brass MS58
Stem	Brass MS58
Stem Packing	Graphite
Seat	PTFE
Gasket	Graphite
Handwheel	Aluminium

Dimensions

Size	V	H	L	DN
1/2"	55	80	70	15
3/4"	70	92	90	20
1"	70	108	99	25
1 1/4"	80	120	108	32
1 1/2"	80	132	130	40
2"	95	155	147	50
2 1/2"	110	220	190	65
3"	130	235	207	80
4"	130	260	220	100