


## Art: 3160 Filtro Válvula Retención Check Valve Strainer

### Características

1. Tamiz en acero inoxidable AISI 304L
2. Racor de Nylon PA 6.6
3. Extremo rosca gas macho según ISO 228/1
4. Temperatura máxima 90 °C

### Features

1. Stainless steel sieve AISI 304L
2. Nylon racord PA 6.6
3. Thread end gas male according to ISO 228/1
4. Maximum temperature 90 °C

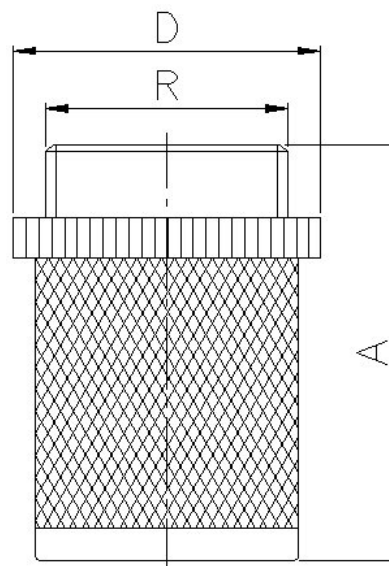

| Ref     | Medida/Size | Dimensiones/Dimensions (mm) |     |     | Peso/Weight (g) |
|---------|-------------|-----------------------------|-----|-----|-----------------|
|         |             | R                           | P   | D   |                 |
| 3160 03 | 3/8"        | 10                          | 23  | 49  | 6               |
| 3160 04 | 1/2"        | 15                          | 28  | 51  | 9               |
| 3160 05 | 3/4"        | 20                          | 34  | 57  | 12              |
| 3160 06 | 1"          | 25                          | 40  | 58  | 18              |
| 3160 07 | 1¼"         | 32                          | 48  | 69  | 21              |
| 3160 08 | 1½"         | 40                          | 58  | 79  | 38              |
| 3160 09 | 2"          | 50                          | 68  | 96  | 60              |
| 3160 10 | 2½"         | 65                          | 83  | 98  | 85              |
| 3160 11 | 3"          | 80                          | 100 | 116 | 118             |
| 3160 12 | 4"          | 100                         | 127 | 133 | 186             |